

## Utility Grade, General Purpose, Crepe Paper Masking Tape

### Technical Data

September 12, 2003

#### Product Description

Utility grade, general purpose, crepe paper masking tape

#### Typical Applications

Used on variety of substrates for general purpose packaging, bundling, holding, splicing, tabbing and banding


**Note: CP-83 is not designed or guaranteed for exacting industrial masking, spray painting or oven baking applications.**

#### Applicable Specifications

N/A

#### Features & Benefits

Good adhesion on variety of substrates, flexible and easy to use. Excellent quick stick and also resists water and oil.

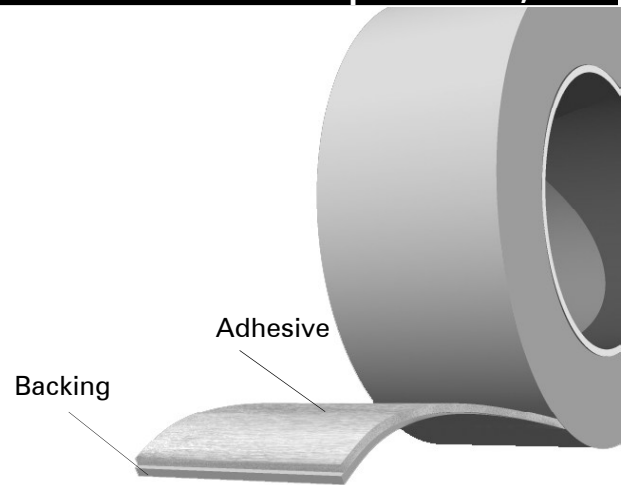

#### Product Construction

Backing: natural-colored crepe paper  
Adhesive: rubber-based adhesive

Physical Properties	Standard	Metric	ASTM Test Method
Tensile Strength	21 lbs./in.	36.19 N/10mm	D 3759/D 3715M
Adhesion to Steel	45 oz./in.	4.85 N/10mm	D 3330/D 3330M
Thickness	5.4 mils	.137 mm	D 3652/D 3652M
Elongation	9%	9%	D 3759/D 3715M
Service Temperature Range	50°F to 180°F	10°C to 66°C	

Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. Shurtape recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.

#### Storage & Usage Conditions

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Storage temperature of 40° - 80° F (4° - 26° C) and 40 to 50 percent relative humidity are recommended. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.